

Square Pull-Up Station Pro

FSW218



Item no. FSW21801-0900

General Product Information

Dimensions LxWxH	5'5"x5'5"x7'10"
Age group	13+
Capacity (users)	4
Color options	 



See KOMPAN Fit app for more



The Square Pull Up Station can be used in many ways and by multiple users at the same time. Exercises range from normal pull ups to the most dynamic and advanced exercises such as the Flying Monkey, where you fly from one bar to another. The Pull Up Bars are made from solid steel and have a diameter of 32 mm. An ideal size for both men and women to have

a good grip. As the highest bar is connected at a height of 233 cm everyone will be able to hang freely, to make sure that everyone can reach the pull up bars there are 2 stepping pods at different heights.



Square Pull-Up Station Pro


FSW218



Post are made of 101.6 x 2mm, pre-galvanized carbon steel and powder coated, a great protection to all conditions.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.

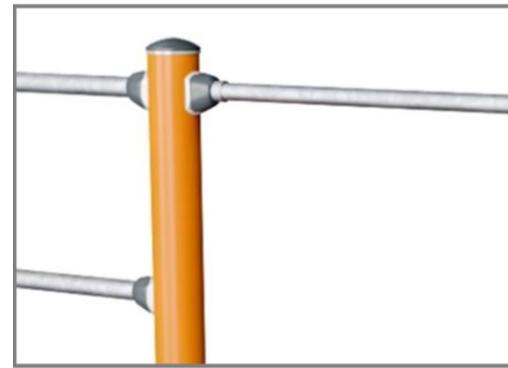

All bars intended for pull ups are made of solid, ø32mm x 138 m, hot dip galvanized, S235JR steel bars. This diameter gives the right grip for everyone.



All KOMPAN fitness products are compliant with the ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed as a static test by adding dynamic factors as well as safety factors to the specified load of 78kg per user. A product intended for 1 user is loaded with 420kg.



The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.



Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm this creates an easy access to reach the overhead activity

Item no. FSW21801-0900

Installation Information

Max. fall height	7'8"
Safety surfacing area	157 ft2
Numbers of installers (persons)	2
Total installation time	3.7
Excavation volume	0.14 yd3
Concrete volume	0.05 yd3
Footing depth (standard)	2'11"
Shipment weight	309 lbs
Anchoring options	In-ground <input checked="" type="checkbox"/> Surface <input checked="" type="checkbox"/>

Warranty Information


Post	10 years
Connectors	10 years
HDG structural parts	Lifetime
Spare parts guaranteed	10 years

Square Pull-Up Station Pro


FSW218

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

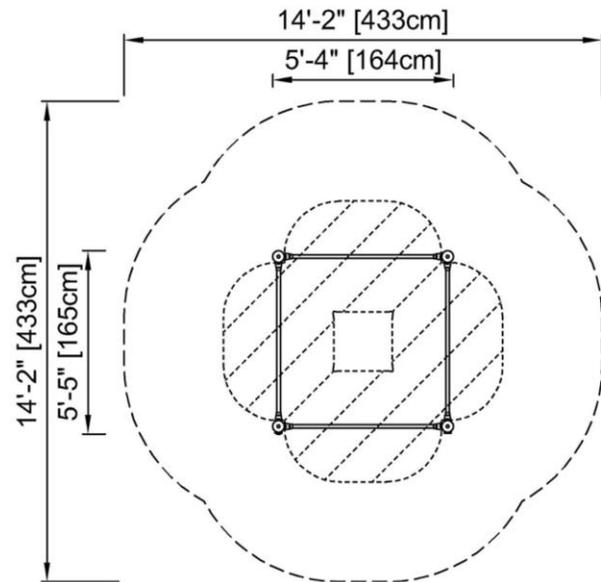

FSW21801
* 7'-8" / 233cm
** 7'-10" / 240cm
*** 157,2ft² / 14.6m²

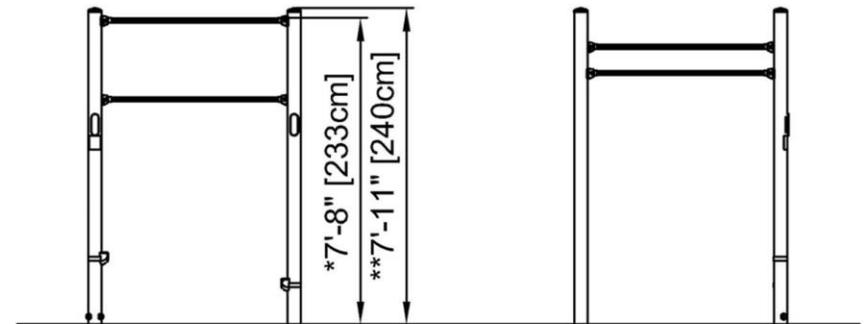

FSW21801
1:100

[Click to see 1:100 ratio TOP VIEW](#)

[Click to see 1:100 ratio SIDE VIEW](#)